


Three-Terminal Positive Voltage Regulator KA180O10

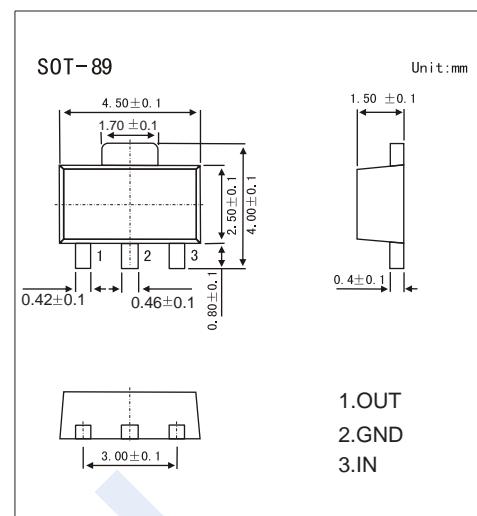

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 10V
- Continuous Total Dissipation P_d : 0.5W ($T_a = 25^\circ C$)
- Marking Code: KL10


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	-55 ~ +125	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

■ Electrical Characteristics ($V_I=17V$, $I_o=40mA$, $C_I=0.33\mu F$, $C_O=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ C$	9.6	10	10.4	V
		$T_J = 0 \sim 125^\circ C$, $13V \leq V_I \leq 25V$, $I_o = 1mA \sim 40mA$	9.5	10	10.5	V
		$T_J = 0 \sim 125^\circ C$, $I_o = 1mA \sim 70mA$	9.5	10	10.5	V
Load Regulation	ΔV_o	$T_J = 25^\circ C$, $I_o = 1mA \sim 100mA$		20	90	mV
		$T_J = 25^\circ C$, $I_o = 1mA \sim 40mA$		11	40	mV
Line Regulation	ΔV_o	$T_J = 25^\circ C$, $13V \leq V_I \leq 25V$		51	175	mV
		$T_J = 25^\circ C$, $14V \leq V_I \leq 25V$		42	125	mV
Quiescent Current	I_Q	$T_J = 25^\circ C$		4.2	6.0	mA
Quiescent current Change	ΔI_Q	$T_J = 0 \sim 125^\circ C$, $14V \leq V_I \leq 25V$		1.5		mA
		$T_J = 0 \sim 125^\circ C$, $1mA \leq I_o \leq 40mA$		0.1		mA
Output Noise Voltage	V_N	$T_J = 25^\circ C$, $10Hz \leq f \leq 100KHz$		62		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ C$, $15V \leq V_I \leq 25V$, $f = 120Hz$	37	44		dB
Dropout Voltage	V_D	$T_J = 25^\circ C$			1.7	V

■ Typical Application

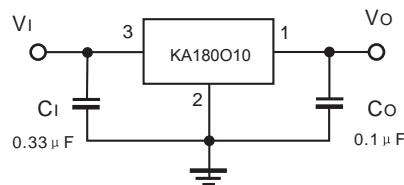

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

KA180O10

■ Typical Characteristics

