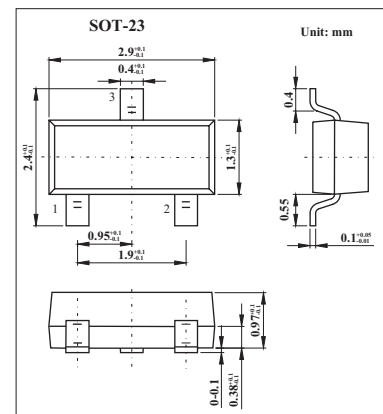


## PIN Diode for VHF,UHF,AGC USE

## 1SV233

## ■ Features

- Very small-sized package facilitates high-density mounting and permits 1SV233-applied equipment to be made smaller.
- Small interterminal capacitance ( $C=0.23$  pF typ).
- Small forward series resistance ( $r_s=5$   $\Omega$  typ).

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Value	Unit
Reverse Voltage	$V_R$	50	V
Forward Current	$I_F$	50	mA
Allowable Power Dissipation	$P$	150	mW
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_R$	$I_R = 10 \mu\text{A}$	50			V
Reverse Current	$I_R$	$V_R = 50\text{V}$			0.1	$\mu\text{A}$
Forward Voltage	$V_F$	$I_F = 50\text{mA}$		0.95		V
Interterminal Capacitance	$C$	$V_R = 50\text{V}, f = 1\text{MHz}$		0.23		pF
Series Resistance	$r_s$	$I_F = 10\text{mA}, f = 100\text{MHz}$		5		$\Omega$

## ■ Marking

Marking	BV